

Why Use Full Synthetic LUBRATEX EP Grease ?

- ✓ Longer re-grease intervals = lower maintenance labor
- ✓ Superior high-load and shock protection
- ✓ Reliable performance in extreme heat and cold
- ✓ Reduced oxidation, hardening, and oil separation
- ✓ Improved corrosion and water resistance
- ✓ Lower total cost of ownership for end users
- ✓ Premium product that supports higher margins
- ✓ Ideal upgrade from conventional lithium grease



“LUBRATEX is engineered for customers who cant afford downtime or costly failures, and focus on longer service life, especially in demanding applications.”



HOME

LUBRATEx

FULL

SYNTHETIC

GREASE

LUBRATEx FULL SYNTHETIC

VS

Conventional Lithium



Temperature Range **-40°C to 220°C**
Wide Range

-20°C to 120°C Moderate Range
Moderate Range



Oxidation Resistance **Excellent Stability**

Good Stability



Low-Temp Performance **Flows in Cold**

Thickens in Cold



Load & Wear Protection **High Load Capacity**

Moderate Load Capacity



Water Resistance **Superior Protection**

Moderate Protection



Shear Stability **Very Durable**

Prone to Breakdown



Service Life **Extended Lifespan**

Shorter Lifespan




Cost Over Time **Lower Overall Cost**

Higher Maintenance Cost


HOME

**Better Base Oil
More Processing
Higher Cost
but ... way
Better Protection**

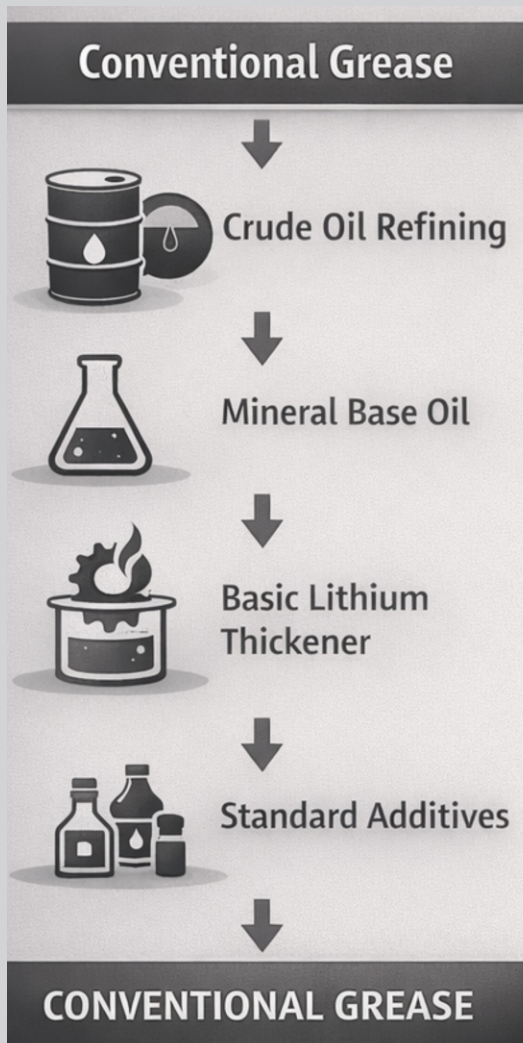

Why Conventional Grease

- Mineral oil refined from crude oil
- Basic lithium soap thickener
- Standard additives

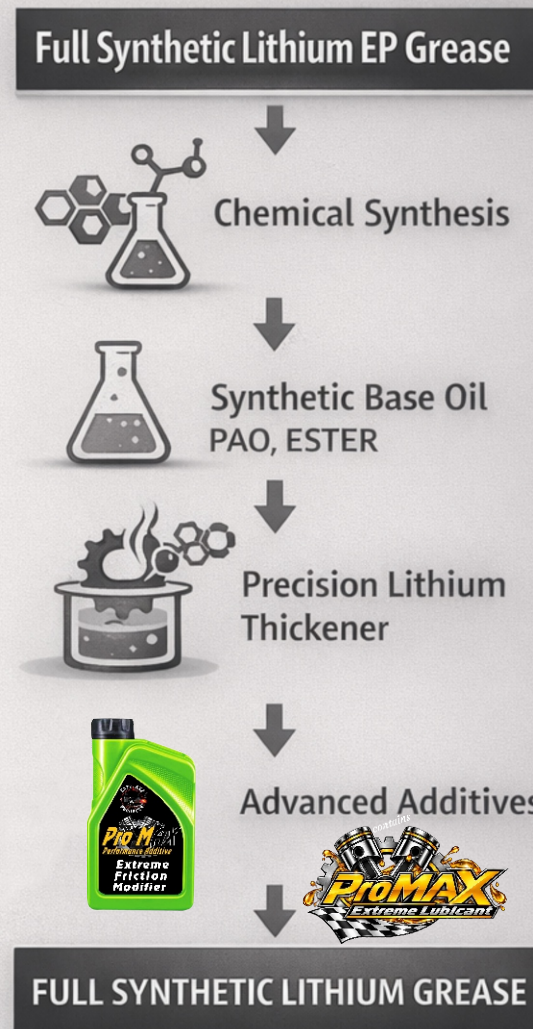

Full Synthetic Lithium EP Grease

- Synthetic base oil chemically engineered
- Precision lithium thickener
- Advanced additives and batch testing

HOME